



US009985989B2

(12) **United States Patent**
Touboul et al.

(10) **Patent No.:** **US 9,985,989 B2**
(45) **Date of Patent:** **May 29, 2018**

(54) **MANAGING DYNAMIC DECEPTIVE ENVIRONMENTS**
(71) Applicant: **Illusive Networks Ltd.**, Tel Aviv (IL)
(72) Inventors: **Shlomo Touboul**, Kfar Chaim (IL); **Hanan Levin**, Tel Aviv (IL); **Stephane Roubach**, Herzliya (IL); **Assaf Mischari**, Petach Tikva (IL); **Itai Ben David**, Tel Aviv (IL); **Itay Avraham**, Tel Aviv (IL); **Adi Ozer**, Shoham (IL); **Chen Kazaz**, Tel Aviv (IL); **Ofer Israeli**, Tel Aviv (IL); **Olga Vingurt**, Shderot (IL); **Liad Gareh**, Herzliya (IL); **Israel Grimberg**, Ra'anana (IL); **Cobby Cohen**, Tel Aviv (IL); **Sharon Sultan**, Tel Aviv (IL); **Matan Kubovsky**, Tel Aviv (IL)

(73) Assignee: **ILLUSIVE NETWORKS LTD.**, Tel Aviv (IL)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days. days.

(21) Appl. No.: **15/679,180**

(22) Filed: **Aug. 17, 2017**

(65) **Prior Publication Data**
US 2018/0027016 A1 Jan. 25, 2018

Related U.S. Application Data

(63) Continuation of application No. 15/406,731, filed on Jan. 15, 2017, now Pat. No. 9,742,805, which is a (Continued)

(51) **Int. Cl.**
H04L 29/06 (2006.01)
G06N 99/00 (2010.01)

(52) **U.S. Cl.**
CPC **H04L 63/1491** (2013.01); **G06N 99/005** (2013.01); **H04L 63/1425** (2013.01); **H04L 63/20** (2013.01)

(58) **Field of Classification Search**
CPC . H04L 63/1491; H04L 63/1425; H04L 63/20; G06N 99/005
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,363,489 B1 3/2002 Comay et al.
6,618,709 B1 9/2003 Sneeringer
(Continued)

FOREIGN PATENT DOCUMENTS

WO 2006131124 A1 12/2006
WO 2015001969 A1 1/2015
WO 2015047555 A1 4/2015

OTHER PUBLICATIONS

Wikipedia, Active Directory, https://en.wikipedia.org/wiki/Active_Directory, Jun. 24, 2015.

(Continued)

Primary Examiner — Darren B Schwartz

(74) *Attorney, Agent, or Firm* — Soquel Group I.P Ltd.

(57) **ABSTRACT**

A deception management system to detect attackers within a dynamically changing network of computer resources, including a deployment governor dynamically designating deception policies, each deception policy including names of non-existing web servers, and levels of diversity for planting the names of non-existing web servers in browser histories of web browsers within resources of the network, the levels of diversity specifying how densely the name of each non-existing web server is planted within resources of the network, a deception deployer dynamically planting the names of non-existing web servers in the browser histories of the web browsers in resources in the network, in accor-

(Continued)

STATUS:

REPLANT DOMAIN

BROWSERS

THE BROWSERS DECEPTION FAMILY PRODUCES DECEPTIVE INFORMATION RELATING TO DOMAIN WEB HOSTS. THE DECEPTIONS ADDED HERE TEMPT AN ATTACKER TO ACCESS A NON-EXISTING WEB SERVER. THIS ACCESS ATTEMPT TRIGGERS AN ALERT THAT EXPOSES THE ATTACKER'S ACTIVITY. [TIPS](#)

BROWSER HISTORY

ADD DECEPTIONS THAT MASQUERADE AS WEB SERVERS (FOR EXAMPLE, THE COMPANY'S WEB PORTAL). ENTER SERVER NAMES TO BE PLANTED IN THE FORMAT HTTP://SERVER-NAME.ILLUSIVE.NG.

PASSWORD FILE

PROTOCOL:

HOST NAME OR IP:

SERVER PATH:

370

< DIVERSITY LEVEL >

- RARE
- ALWAYS
- NEVER
- NORMAL
- COMMON
- ALWAYS

■ HTTP://WWW.ILLUSIVE.NG/
 ■ HTTP://SHARDPOINT.ILLUSIVE.NG/
 ■ HTTP://CRM.ILLUSIVE.NG/
 ■ HTTP://FINANCE.ILLUSIVE.NG/
 ■ HTTP://FINANCE.ILLUSIVE.NG/
 ■ HTTP://FINANCE.ILLUSIVE.NG/
 ■ HTTP://FINANCE.ILLUSIVE.NG/

dance with the levels of diversity of the current deception policy, and a notification processor transmitting an alert to an administrator of the network in response to an attempt to access one of the non-existing web servers.

8 Claims, 7 Drawing Sheets

Related U.S. Application Data

continuation of application No. 15/175,048, filed on Jun. 7, 2016, now Pat. No. 9,553,886.

- (60) Provisional application No. 62/172,251, filed on Jun. 8, 2015, provisional application No. 62/172,253, filed on Jun. 8, 2015, provisional application No. 62/172,255, filed on Jun. 8, 2015, provisional application No. 62/172,259, filed on Jun. 8, 2015, provisional application No. 62/172,261, filed on Jun. 8, 2015.

(56)

References Cited

U.S. PATENT DOCUMENTS

2004/0172557	A1	9/2004	Nakae et al.
2004/0255155	A1	12/2004	Stading
2005/0114711	A1	5/2005	Hesselink et al.
2005/0132206	A1	6/2005	Palliyil et al.
2005/0149480	A1	7/2005	Deshpande
2005/0235360	A1	10/2005	Pearson
2006/0010493	A1	1/2006	Piesco et al.
2006/0041761	A1	2/2006	Neumann et al.
2006/0069697	A1*	3/2006	Shraim H04L 51/12
2006/0101516	A1	5/2006	Sudaharan et al.
2006/0161982	A1	7/2006	Chari et al.
2006/0224677	A1	10/2006	Ishikawa et al.
2006/0242701	A1	10/2006	Black et al.
2007/0028301	A1	2/2007	Shull et al.
2007/0039038	A1*	2/2007	Goodman H04L 63/1408 726/2
2007/0157315	A1	7/2007	Moran
2007/0192853	A1	8/2007	Shraim et al.
2007/0226796	A1	9/2007	Gilbert et al.
2007/0299777	A1*	12/2007	Shraim G06Q 10/107 705/51
2008/0016570	A1	1/2008	Capalik
2008/0086773	A1	4/2008	Tuvell et al.
2008/0155693	A1	6/2008	Mikan et al.
2009/0019547	A1	1/2009	Palliyil et al.
2009/0144827	A1	6/2009	Peinado et al.
2009/0222920	A1	9/2009	Chow et al.
2009/0241101	A1	9/2009	Keromytis et al.
2009/0241173	A1*	9/2009	Troyansky G06F 21/552 726/5
2009/0241196	A1	9/2009	Troyansky et al.
2009/0328216	A1	12/2009	Rafalovich et al.
2010/0058456	A1	3/2010	Jajodia et al.
2010/0071051	A1	3/2010	Choyi et al.
2010/0077483	A1*	3/2010	Stolfo G06F 21/554 726/24
2010/0082513	A1	4/2010	Liu
2010/0251369	A1	9/2010	Grant
2010/0269175	A1	10/2010	Stolfo et al.
2011/0016527	A1	1/2011	Yanovsky et al.
2011/0154494	A1	6/2011	Sundaram et al.
2011/0167494	A1	7/2011	Bowen et al.
2011/0214182	A1	9/2011	Adams et al.
2011/0258705	A1	10/2011	Vestergaard et al.
2011/0307705	A1	12/2011	Fielder
2012/0005756	A1	1/2012	Hoefelmeyer et al.
2012/0084866	A1*	4/2012	Stolfo G06F 21/554 726/25
2012/0167208	A1	6/2012	Buford et al.
2012/0210388	A1	8/2012	Kolishchak
2012/0246724	A1	9/2012	Sheymov et al.
2012/0311703	A1	12/2012	Yanovsky et al.
2013/0061055	A1	3/2013	Schibuk
2013/0086691	A1	4/2013	Fielder
2013/0212644	A1	8/2013	Hughes et al.
2013/0227697	A1	8/2013	Zandani
2013/0263226	A1	10/2013	Sudia
2014/0082730	A1	3/2014	Vashist et al.
2014/0101724	A1	4/2014	Wick et al.
2014/0115706	A1	4/2014	Silva et al.
2014/0201836	A1	7/2014	Amsler
2014/0208401	A1	7/2014	Balakrishnan et al.
2014/0237599	A1	8/2014	Gertner et al.
2014/0259095	A1	9/2014	Bryant
2014/0298469	A1	10/2014	Marion et al.
2014/0310770	A1	10/2014	Mahaffey
2014/0337978	A1	11/2014	Keromytis et al.
2014/0359708	A1	12/2014	Schwartz
2015/0007326	A1	1/2015	Mooring et al.
2015/0013006	A1*	1/2015	Shulman H04L 63/1416 726/23
2015/0047032	A1	2/2015	Hannis et al.
2015/0074750	A1	3/2015	Pearcy et al.
2015/0074811	A1	3/2015	Capalik
2015/0096048	A1	4/2015	Zhang et al.
2015/0128246	A1	5/2015	Feghali et al.
2015/0156211	A1	6/2015	Chi Tin et al.
2015/0326587	A1	11/2015	Vissamsetty et al.
2015/0326598	A1	11/2015	Vasseur et al.
2003/0084349	A1	5/2003	Friedrichs et al.
2003/0110396	A1	6/2003	Lewis et al.
2003/0145224	A1	7/2003	Bailey
2004/0088581	A1	5/2004	Brawn et al.
2004/0128543	A1*	7/2004	Blake H04L 63/0227 726/25
2004/0148521	A1*	7/2004	Cohen H04L 63/0263 726/22
2004/0160903	A1	8/2004	Gai et al.

(56)

References Cited

U.S. PATENT DOCUMENTS

2016/0019395	A1	1/2016	Ramalingam et al.
2016/0080414	A1	3/2016	Kolton et al.
2016/0212167	A1	7/2016	Dotan et al.
2016/0261608	A1	9/2016	Hu et al.
2016/0300227	A1	10/2016	Subhedar et al.
2016/0308895	A1	10/2016	Kotler et al.
2016/0323316	A1	11/2016	Kolton et al.
2016/0373447	A1	12/2016	Akiyama et al.
2017/0032130	A1	2/2017	Durairaj et al.

OTHER PUBLICATIONS

Wikipedia, Apple Filing Protocol, https://en.wikipedia.org/wiki/Apple_Filing_Protocol, Aug. 14, 2015.

Wikipedia, DMZ (computing), [https://en.wikipedia.org/wiki/DMZ_\(computing\)](https://en.wikipedia.org/wiki/DMZ_(computing)), Jun. 17, 2015.

Wikipedia, Domain Name System, https://en.wikipedia.org/wiki/Domain_Name_System, Jul. 14, 2015.

Wikipedia, Firewall (computing), [https://en.wikipedia.org/wiki/Firewall_\(computing\)](https://en.wikipedia.org/wiki/Firewall_(computing)), Jul. 14, 2015.

Wikipedia, Honeygot (computing), [https://en.wikipedia.org/wiki/Honeygot_\(computing\)](https://en.wikipedia.org/wiki/Honeygot_(computing)), Jun. 21, 2015.

Wikipedia, Kerberos (protocol), [https://en.wikipedia.org/wiki/Kerberos_\(protocol\)](https://en.wikipedia.org/wiki/Kerberos_(protocol)), Jun. 30, 2015.

Wikipedia, Lightweight Directory Access Protocol, https://en.wikipedia.org/wiki/Lightweight_Directory_Access_Protocol, Aug. 15, 2015.

Wikipedia, LM hash, https://en.wikipedia.org/wiki/LM_hash, Jun. 8, 2015.

Wikipedia, Radius, <https://en.wikipedia.org/wiki/RADIUS>, Aug. 16, 2015.

Wikipedia, Rainbow table, https://en.wikipedia.org/wiki/Rainbow_table, Jul. 14, 2015.

Wikipedia, Secure Shell, https://en.wikipedia.org/wiki/Secure_Shell, Jul. 12, 2015.

Wikipedia, Security Information and Event Management, https://en.wikipedia.org/wiki/Security_information_and_event_management, Jun. 23, 2015.

Wikipedia, Tarpit (networking), [https://en.wikipedia.org/wiki/Tarpit_\(networking\)](https://en.wikipedia.org/wiki/Tarpit_(networking)), Jul. 3, 2014.

U.S. Appl. No. 15/004,904, Office Action, dated May 27, 2016, 16 pages.

U.S. Appl. No. 15/004,904, Notice of Allowance, dated Oct. 19, 2016, 13 pages.

U.S. Appl. No. 15/175,048, Notice of Allowance, dated Oct. 13, 2016, 17 pages.

U.S. Appl. No. 15/175,050, Office Action, dated Aug. 19, 2016, 34 pages.

U.S. Appl. No. 15/175,050, Office Action, dated Nov. 30, 2016, 31 pages.

U.S. Appl. No. 15/175,050, Notice of Allowance, dated Mar. 21, 2017, 13 pages.

U.S. Appl. No. 15/175,052, Office Action, dated Feb. 13, 2017, 19 pages.

U.S. Appl. No. 15/175,052, Office Action, dated Jun. 6, 2017, 19 pages.

U.S. Appl. No. 15/175,054, Notice of Allowance, dated Feb. 21, 2017, 13 pages.

U.S. Appl. No. 15/403,194, Office Action, dated Feb. 28, 2017, 13 pages.

U.S. Appl. No. 15/406,731, Notice of Allowance, dated Apr. 20, 2017.

PCT Application No. PCT/IL16/50103, International Search Report and Written Opinion, dated May 26, 2016, 9 pages.

PCT Application No. PCT/IL16/50579, International Search Report and Written Opinion, dated Sep. 30, 2016, 7 pages.

PCT Application No. PCT/IL16/50581, International Search Report and Written Opinion, dated Nov. 29, 2016, 10 pages.

PCT Application No. PCT/IL16/50582, International Search Report and Written Opinion, dated Nov. 16, 2016, 11 pages.

PCT Application No. PCT/IL16/50583, International Search Report and Written Opinion, dated Dec. 8, 2016, 10 pages.

Mishra et al., Intrusion detection in wireless ad hoc networks, IEEE Wireless Communications, Feb. 2004, pp. 48-60.

Zhang et al., Intrusion detection techniques for mobile wireless networks, Journal Wireless Networks vol. 9(5), Sep. 2003, pp. 545-556, Kluwer Academic Publishers, the Netherlands.

* cited by examiner

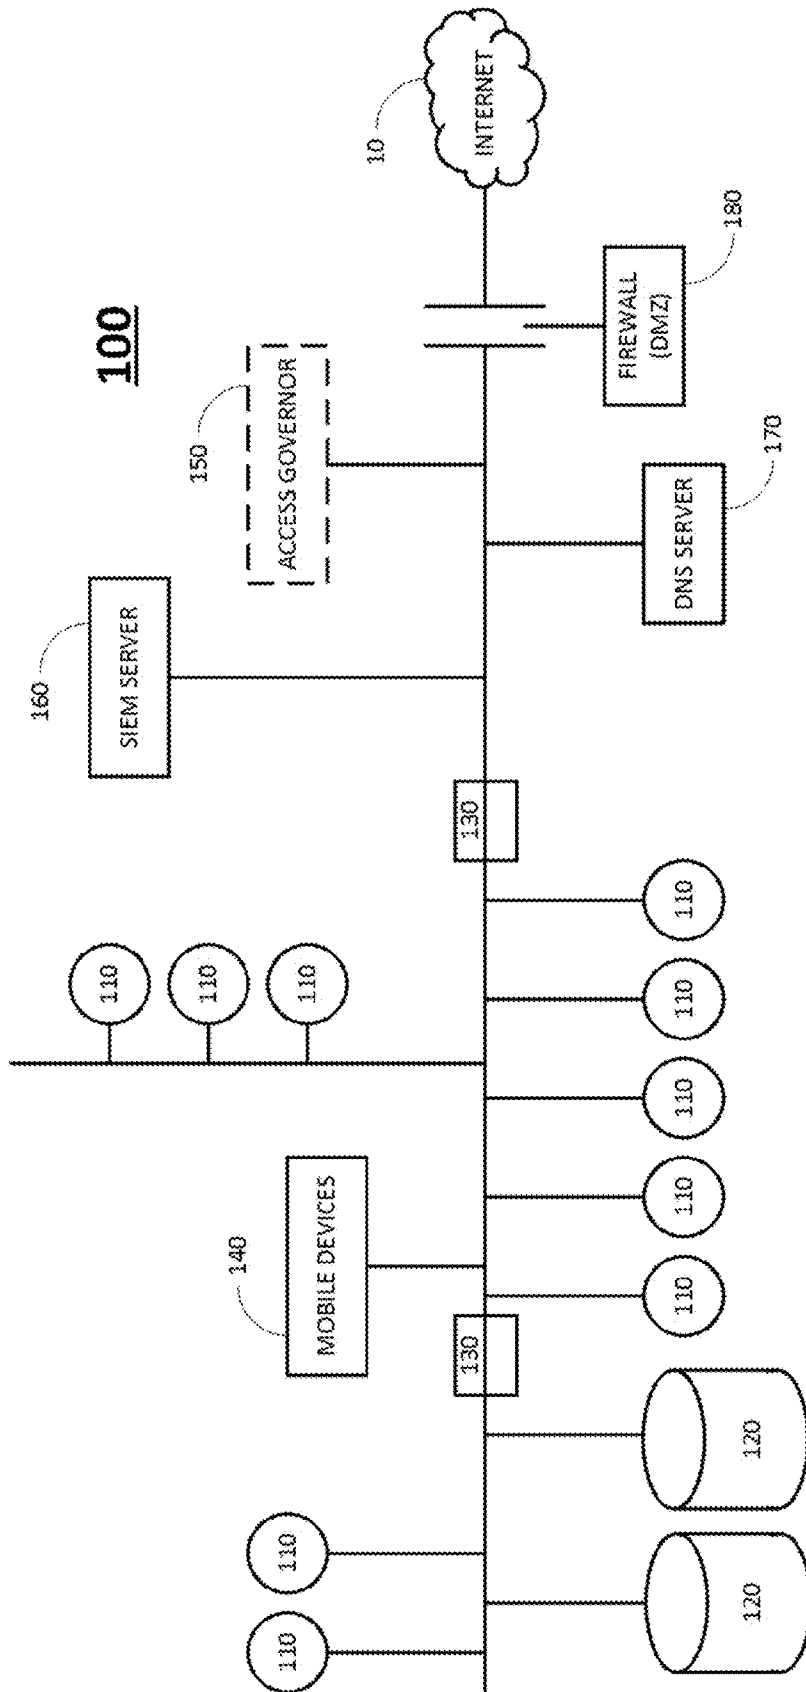


FIG. 1

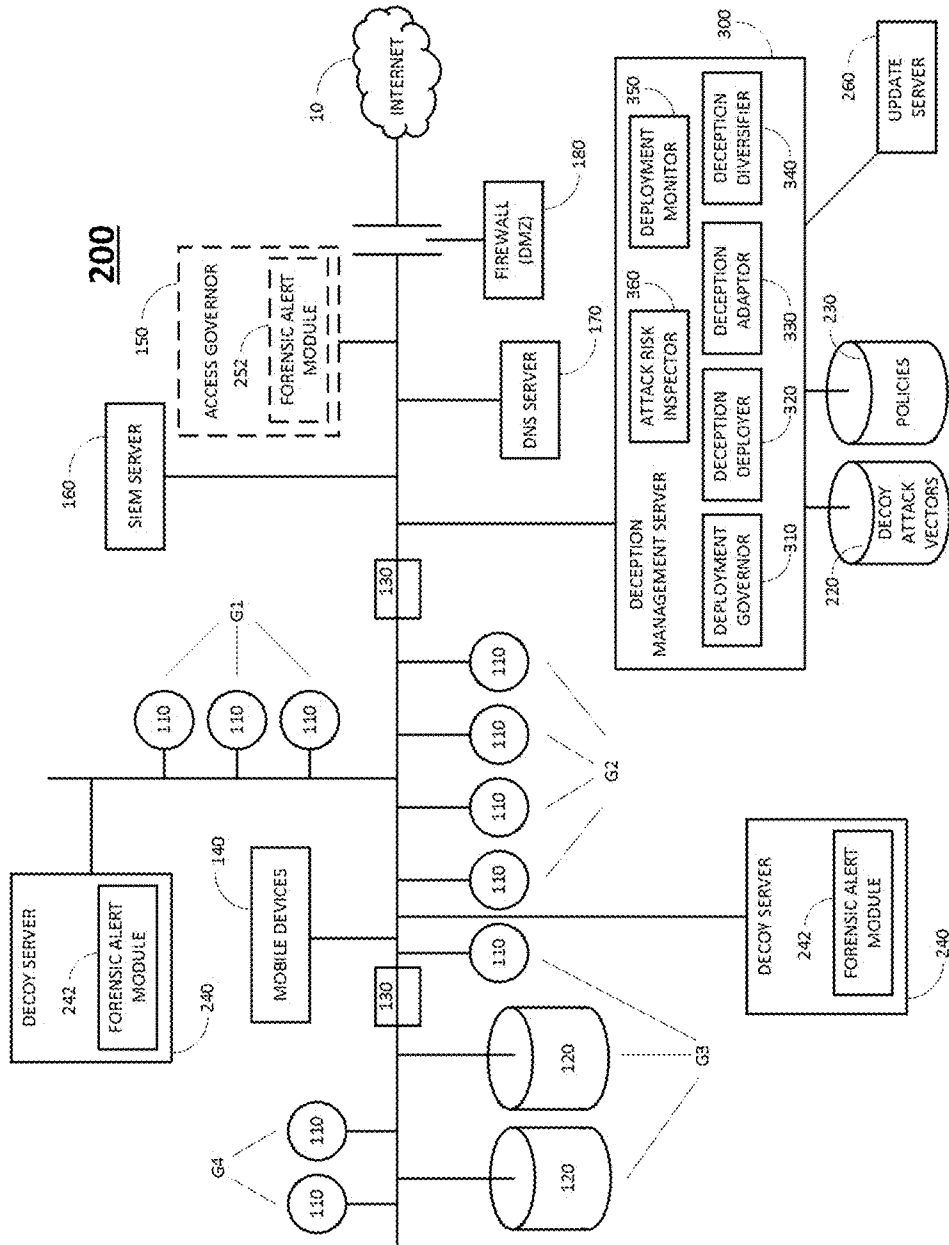


FIG. 2

DECEPTION CONFIGURATION

10/10 ACTIVE DECEPTION 32 DECEPTION CONFIGURED VIEW DECEPTIONS ^

BROWSERS	DATABASES	FILES	FTP	RDP	RECENTS	SCANNERS	SHARES	SSH	WINDOWS
----------	-----------	-------	-----	-----	---------	----------	--------	-----	---------

PLANT DOMAIN

FILES

THE FILES DECEPTION FAMILY PRODUCES DECEPTIVE INFORMATION RELATING TO SAVED CREDENTIALS IN LOCAL FILES. THE DECEPTIONS ADDED HERE TEMPT AN ATTACKER TO ACCESS A FILE CONTAINING NON-EXISTING USERNAMES AND PASSWORDS, AND TO USE THOSE CREDENTIALS TO ACCESS NETWORK LOCATIONS. THIS ACCESS ATTEMPT TRIGGERS AN ALERT THAT EXPOSES THE ATTACKER'S ACTIVITY.

PASSWORD FILE

ADD DECEPTIONS THAT MASQUERADE AS CREDENTIALS, TO BE SAVED IN THE DECEPTIVE FILE.

HEADER (OPTIONAL) HEADER (OPTIONAL) HRtmp qqzWSX1@3

USERNAME USERNAME OLD CRED\$ FOR CRMACME.COM SUPPORT!

PASSWORD PASSWORD r00h123

GENERATE ENTITIES ADD

< DIVERSITY LEVEL

STATUS:

FIG. 3

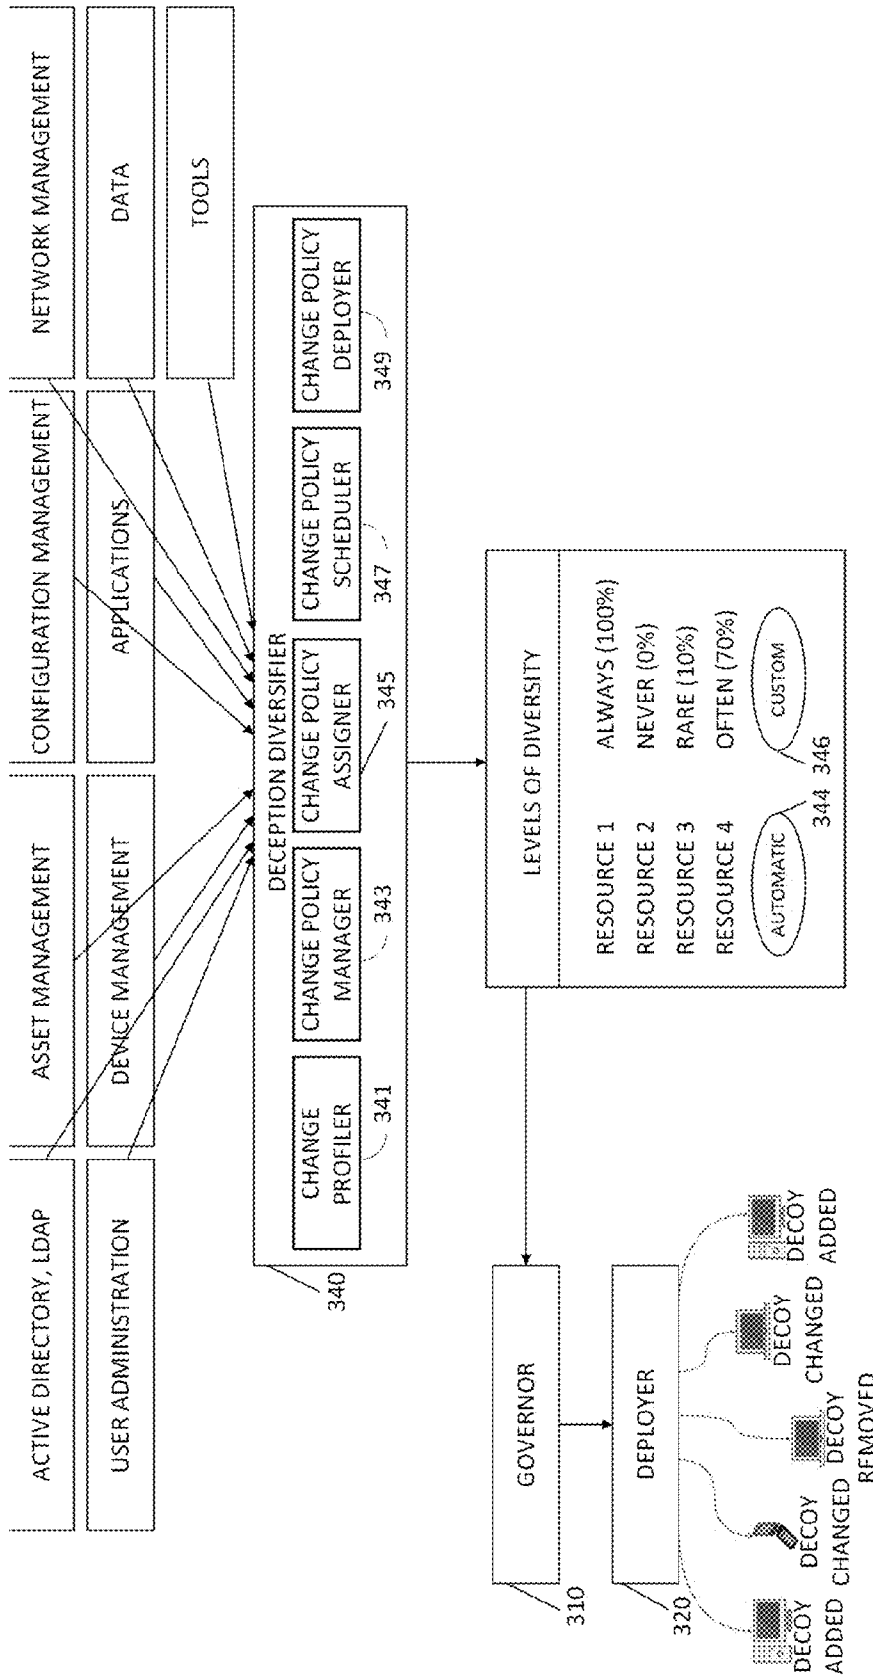


FIG. 4

STATUS:

PLANT DOMAIN

BROWSERS
 THE BROWSERS DECEPTION FAMILY PRODUCES DECEPTIVE INFORMATION RELATING TO DOMAIN WEB HOSTS. THE DECEPTIONS ADDED HERE TEMPT AN ATTACKER TO ACCESS A NON-EXISTING WEB SERVER. THIS ACCESS ATTEMPT TRIGGERS AN ALERT THAT EXPOSES THE ATTACKER'S ACTIVITY.

BROWSER HISTORY
 ADD DECEPTIONS THAT MASQUERADE AS WEB SERVERS (FOR EXAMPLE, THE COMPANY'S WEB PORTAL). ENTER SERVER NAMES TO BE PLANTED IN THE FORMAT HTTP://SERVER-NAME.ILLUSIVE.NG.

PASSWORD FILE

PROTOCOL:

HOST NAME OR IP:

SERVER PATH:

HTTP://WIKI.ILLUSIVE.NG/
 HTTP://SHARPOINT.ILLUSIVE.NG/
 HTTP://CRM.ILLUSIVE.NG/
 HTTP://TICKETS.ILLUSIVE.NG/
 HTTP://FINANCE.ILLUSIVE.NG/
 HTTP://FILE64.ILLUSIVE.NG/

< DIVERSITY LEVEL

RARE
 ALWAYS
 NEVER
 NORMAL
 COMMON
 ALWAYS

370

FIG. 5

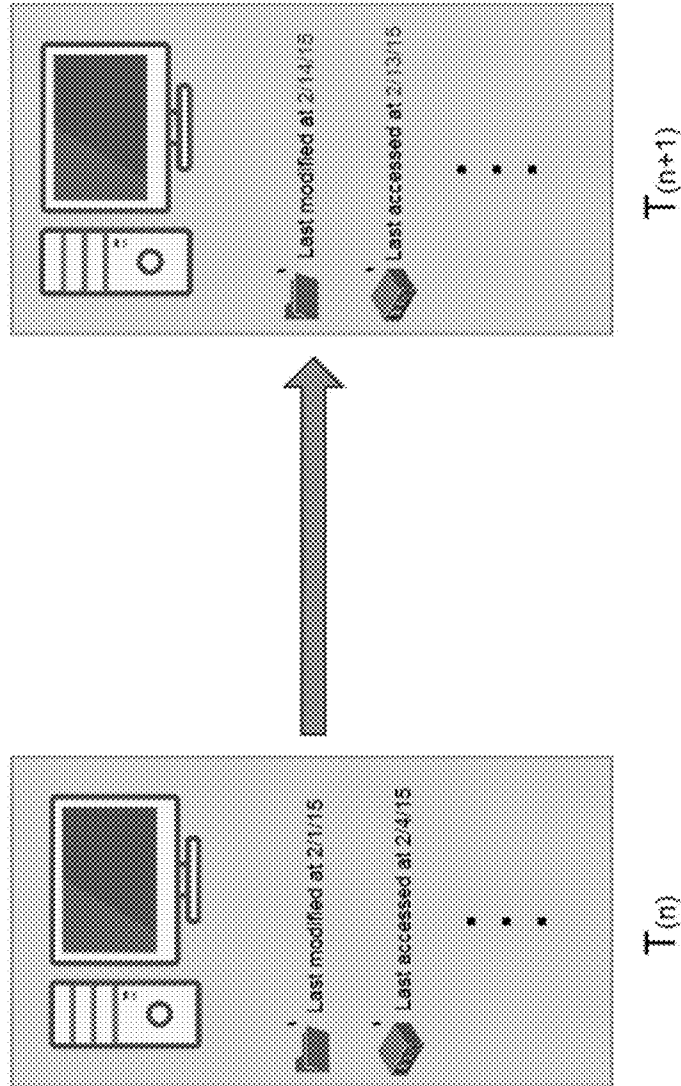


FIG. 6

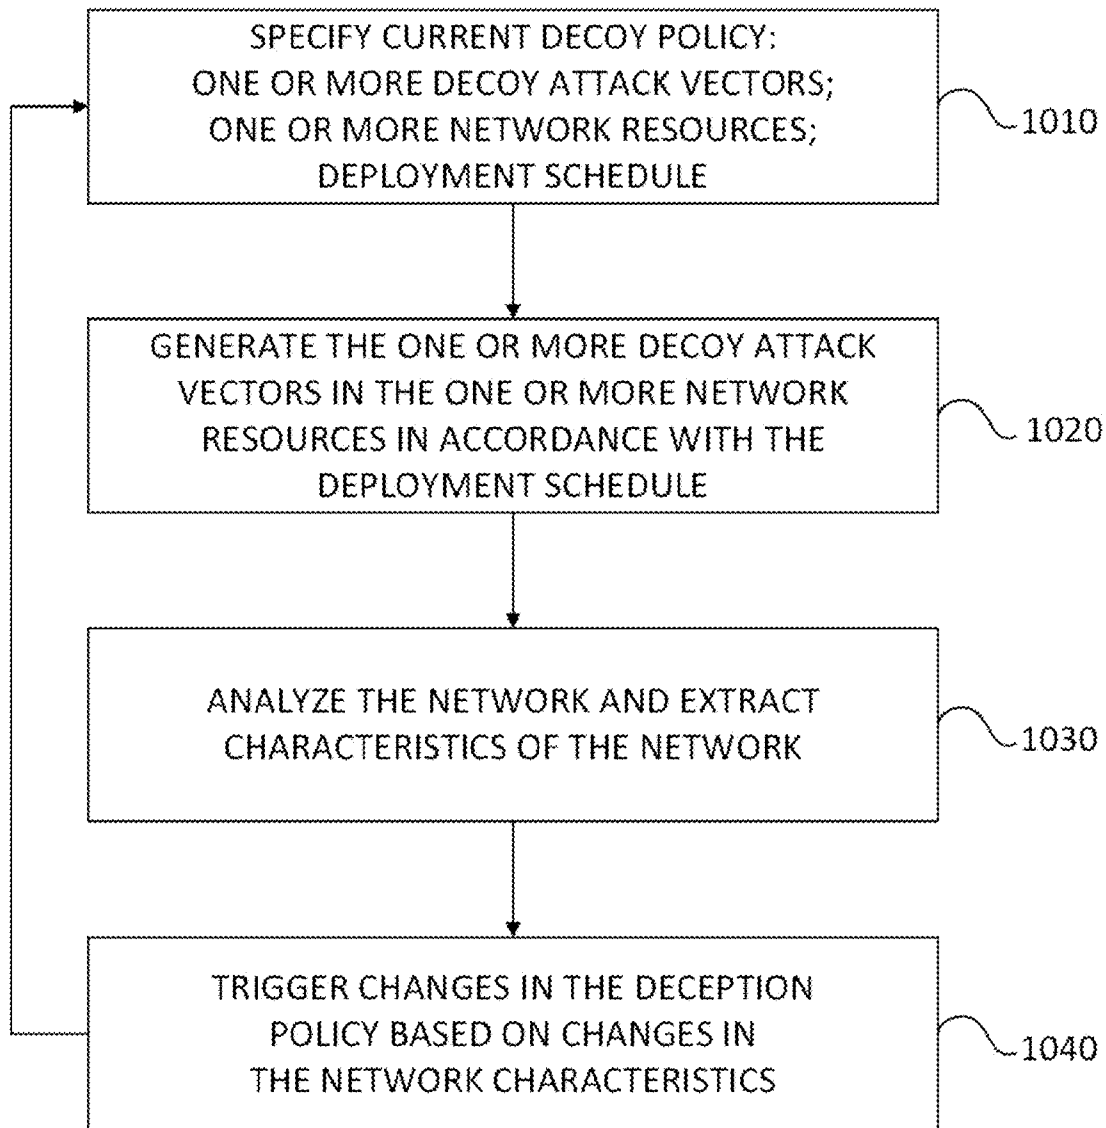


FIG. 7

MANAGING DYNAMIC DECEPTIVE ENVIRONMENTS

CROSS REFERENCES TO RELATED APPLICATIONS

This application is a non-provisional of U.S. Provisional Application No. 62/172,251, entitled SYSTEM AND METHOD FOR CREATION, DEPLOYMENT AND MANAGEMENT OF AUGMENTED ATTACKER MAP, and filed on Jun. 8, 2015 by inventors Shlomo Touboul, Hanan Levin, Stephane Roubach, Assaf Mischari, Itai Ben David, Itay Avraham, Adi Ozer, Chen Kazaz, Ofer Israeli, Olga Vingurt, Liad Gareh, Israel Grimberg, Cobby Cohen and Sharon Sultan, the contents of which are hereby incorporated herein in their entirety.

This application is a non-provisional of U.S. Provisional Application No. 62/172,253, entitled SYSTEM AND METHOD FOR MULTI-LEVEL DECEPTION MANAGEMENT AND DECEPTION SYSTEM FOR MALICIOUS ACTIONS IN A COMPUTER NETWORK, and filed on Jun. 8, 2015 by inventors Shlomo Touboul, Hanan Levin, Stephane Roubach, Assaf Mischari, Itai Ben David, Itay Avraham, Adi Ozer, Chen Kazaz, Ofer Israeli, Olga Vingurt, Liad Gareh, Israel Grimberg, Cobby Cohen and Sharon Sultan, the contents of which are hereby incorporated herein in their entirety.

This application is a non-provisional of U.S. Provisional Application No. 62/172,255, entitled METHODS AND SYSTEMS TO DETECT, PREDICT AND/OR PREVENT AN ATTACKER'S NEXT ACTION IN A COMPROMISED NETWORK, and filed on Jun. 8, 2015 by inventors Shlomo Touboul, Hanan Levin, Stephane Roubach, Assaf Mischari, Itai Ben David, Itay Avraham, Adi Ozer, Chen Kazaz, Ofer Israeli, Olga Vingurt, Liad Gareh, Israel Grimberg, Cobby Cohen and Sharon Sultan, the contents of which are hereby incorporated herein in their entirety.

This application is a non-provisional of U.S. Provisional Application No. 62/172,259, entitled MANAGING DYNAMIC DECEPTIVE ENVIRONMENTS, and filed on Jun. 8, 2015 by inventors Shlomo Touboul, Hanan Levin, Stephane Roubach, Assaf Mischari, Itai Ben David, Itay Avraham, Adi Ozer, Chen Kazaz, Ofer Israeli, Olga Vingurt, Liad Gareh, Israel Grimberg, Cobby Cohen and Sharon Sultan, the contents of which are hereby incorporated herein in their entirety.

This application is a non-provisional of U.S. Provisional Application No. 62/172,261, entitled SYSTEMS AND METHODS FOR AUTOMATICALLY GENERATING NETWORK ENTITY GROUPS BASED ON ATTACK PARAMETERS AND/OR ASSIGNMENT OF AUTOMATICALLY GENERATED SECURITY POLICIES, and filed on Jun. 8, 2015 by inventors Shlomo Touboul, Hanan Levin, Stephane Roubach, Assaf Mischari, Itai Ben David, Itay Avraham, Adi Ozer, Chen Kazaz, Ofer Israeli, Olga Vingurt, Liad Gareh, Israel Grimberg, Cobby Cohen and Sharon Sultan, the contents of which are hereby incorporated herein in their entirety.

FIELD OF THE INVENTION

The present invention relates to cyber security, and in particular to security against attackers.

BACKGROUND OF THE INVENTION

Reference is made to FIG. 1, which is a simplified diagram of a prior art enterprise network **100** connected to

an external internet **10**. Network **100** is shown generally with resources including computers **110**, servers **120**, switches and routers **130**, and mobile devices **140** such as smart phones and tablets, for ease of presentation, although it will be appreciated by those skilled in the art that enterprise networks today are generally much more varied and complex and include other devices such as printers, phones and any Internet of Things objects. The various connections shown in FIG. 1 may be direct or indirect, wired or wireless communications, or a combination of wired and wireless connections. Computers **110** and servers **120** may be physical elements or logical elements, or a mix of physical and logical elements. Computers **110** and servers **120** may be physical or virtual machines. Computers **110** and servers **120** may be local, remote or cloud-based elements, or a mix of local, remote and cloud-based elements. Computers **110** may be client workstation computers. Servers **120** may be file transfer protocol (FTP) servers, email servers, structured query language (SQL) servers, secure shell (SSH) servers, and other database and application servers.

Access to computers **110** and servers **120** in network **100** may optionally be governed by an access governor **150**, such as a directory service, that authorizes users to access computers **110** and servers **120** based on "credentials" and other methods of authentication. Access governor **150** may be a name directory, such as ACTIVE DIRECTORY® developed by Microsoft Corporation of Redmond, Wash., for WINDOWS® environments. Background information about ACTIVE DIRECTORY is available at Wikipedia. Other access governors for WINDOWS and non-WINDOWS environments include inter alia Lightweight Directory Access Protocol (LDAP), Remote Authentication Dial-In User Service (RADIUS), and Apple Filing Protocol (AFP), formerly APPLETALK®, developed by Apple Inc. of Cupertino, Calif. Background information about LDAP, RADIUS and AFP is available at Wikipedia.

Access governor **150** may be one or more local machine access controllers. For networks that do not include an access governor, authentication may be performed by other servers **120**. Alternatively, in lieu of access governor **150**, resources of network **100** determine their local access rights.

Credentials for accessing computers **110** and servers **120** include inter alia server account credentials such as <address> <username> <password> for an FTP server, a database server, or an SSH server. Credentials for accessing computers **110** and servers **120** also include user login credentials <username> <password>, or <username> <ticket>, where "ticket" is an authentication ticket, such as a ticket for the Kerberos authentication protocol or NTLM hash used by Microsoft Corp., or login credentials via certificates or via another implementation used today or in the future. Background information about the Kerberos protocol and LM hashes is available at Wikipedia.

Access governor **150** may maintain a directory of computers **110**, servers **120** and their users. Access governor **150** authorizes users and computers, assigns and enforces security policies, and installs and updates software.

Computers **110** may run a local or remote security service, which is an operating system process that verifies users logging in to computers, to single sign-on systems, and to credential storage systems.

Network **100** may include a security information and event management (SIEM) server **160**, which provides real-time analysis of security alerts generated by network hardware and applications. Background information about SIEM is available at Wikipedia.

Network 100 may include a domain name system (DNS) server 170, or such other name service system, for translating domain names to IP addresses. Background information about DNS is available at Wikipedia.

Network 100 may include a firewall 180 located within a gateway between enterprise network 100 and external internet 10. Firewall 180 controls incoming and outgoing traffic for network 100. Background information about firewalls is available at Wikipedia.

One of the most prominent threats that organizations face is a targeted attack; i.e., an individual or group of individuals that attacks the organization for a specific purpose, such as stealing data, using data and systems, modifying data and systems, and sabotaging data and systems. Targeted attacks are carried out in multiple stages, typically including inter alia reconnaissance, penetration and lateral movement. Lateral movement involves orientation, movement and propagation, and includes establishing a foothold within the organization and expanding that foothold to additional systems within the organization.

In order to carry out the lateral movement stage, an attacker, whether a human being who is operating tools within the organization's network, or a tool with "learning" capabilities, learns information about the environment it is operating in, such as network topology, network devices and organization structure, learns "where can I go from my current location" and "how can I move from my current location to another location (privilege required)", learns implemented security solutions, learns applications that he can leverage, and then operates in accordance with that data.

An advanced attacker may use different attack techniques to enter a corporate network and to move laterally within the network in order to obtain his resource goals. The advanced attacker may begin with a workstation, server or any other network entity to start his lateral movement. He uses different methods to enter the network, including inter alia social engineering, existing exploits and vulnerabilities, and a Trojan horse or any other malware allowing him to control a first node or nodes.

Once an attacker has taken control of a first node in a corporate network, he uses different advanced attack techniques for orientation and propagation and discovery of additional ways to reach other network nodes in the corporate network. Attacker movement from node to node is performed via an "attack vector", which is an object discovered by the attacker, including inter alia an object in memory or storage of a first computer that may be used to access or discover a second computer.

Exemplary attack vectors include inter alia credentials of users with escalated privileges, existing shared location names stored on different servers and workstations, and details including the address and credentials of an FTP server, an email server, a database server or an SSH server. Attack vectors are often available to an attacker because a user did not log off from a workstation, did not log out of an application, or did not clear his cache. E.g., if a user contacted a help desk and gave a help desk administrator remote access to his workstation and if the help desk administrator did not properly log off from the remote access session to the user's workstation, then the help desk access credentials may still be stored in the user's local cache and available to the attacker. Similarly, if the user accessed a server, e.g., an FTP server, then the FTP account login parameters may be stored in the user's local cache or profile and available to the attacker.

Attack vectors enable inter alia a move from workstation A→server B based on a shared server host name and its

credentials, connection to a different workstation using local admin credentials that reside on a current workstation, and connection to an FTP server using specific access credentials.

Whereas IT "sees" the logical and physical network topology, an attacker that lands on the first network node or nodes "sees" attack vectors that depart from that node and move laterally to other nodes. The attacker can move to such nodes and then follow "attack paths" by successively discovering attack vectors from node to node.

When the attacker implements such a discovery process on all nodes in the network, he will be able to "see" all attack vectors of the corporate network and generate a "complete attack map". Before the attacker discovers all attack vectors on network nodes and completes the discovery process, he generates a "current attack map" that is currently available to him.

An objective of the attacker is to discover an attack path that leads him to a target network node. The target may be a bank's authorized server that is used by the corporation for ordering bank account transfers of money, it may be an FTP server that updates the image of all corporate points of sale, it may be a server or workstation that stores confidential information such as source code and secret formulas of the corporation, or it may be any other network nodes that are of value to the attacker and are his "attack goal nodes".

When the attacker lands on the first node, but does not know how to reach the attack goal node, he generates a current attack map that leads to the attack goal node.

One method to defend against such attacks, termed "honeypots", is to plant and monitor bait resources, with the objective that the attacker learn of their existence and then consume those bait resources, and to notify an administrator of the malicious activity. Background information about honeypots is available at Wikipedia.

Conventional honeypot systems operate by monitoring access to a supervised element in a computer network, the supervised element being a fake server or a fake service. Access monitoring generates many false alerts, caused by non-malicious access from automatic monitoring systems and by user mistakes. Conventional systems try to mitigate this problem by adding a level of interactivity to the honeypot, and by performing behavioral analysis of suspected malware if it has infected the honeypot itself.

Deception systems are used by organizations in order to deceive attackers into making detectable actions. However, attackers attempt to detect and avoid deceptions. When persistent attackers fail to progress, they try again and again until they find a successful path. They do so by elements within the environment.

Conventional deception systems like honeypots are flawed by being static, which allows the attacker to learn of their deceptions in ways such as the following.

Found deceptions—if an attacker previously acted on deceptive data and was caught, he may know not to stumble upon that same deception again.

Static deceptions—enterprise environments change over time. Static deceptions that do not change with the enterprise environment stand out as being different and, as such, may indicate a deception fingerprint.

Stale deceptions—if an attacker finds a deception element that has not been active for a long time, the attacker identifies it as being deceptive and avoids it.

Unfit deceptions—if an attacker finds a deception element that does not fit the enterprise environment, or that does

5

not conform to an enterprise convention, it may stand out as being different and, as such, may indicate a deception fingerprint.

Uniform deceptions—if an attacker finds a deception element that exists on all or most computers, it may stand out and as such, may indicate a deception fingerprint.

When creating and using deceptive environments used for deceiving attackers, it is important that the deceptive environment naturally fit in the enterprise network environment and change along with it. In this changing enterprise environment, static non-diversified and unchanging deceptive environments are not effective in deceiving, and hence deceptive environments need to become dynamic and to adapt to changes that occur in the enterprise environment.

SUMMARY

Embodiments of the present invention provide systems and methods for managing dynamic deceptive environments, which constantly adapt to changes that occur in the enterprise environment.

There is thus provided in accordance with an embodiment of the present invention a deception management system (DMS) to detect attackers within a dynamically changing network of resources, including a deployment governor dynamically designating a deception policy that includes one or more decoy attack vectors, one or more resources of a network in which the one or more decoy attack vectors are generated, and a schedule for generating the one or more decoy attack vectors in the one or more resources, wherein an attack vector is an object in a first resource that may be used to access or discover a second resource, and wherein the network of resources is dynamically changing, a deception deployer dynamically generating one or more decoy attack vectors on one or more resources in the network, in accordance with the current deception policy, a deception adaptor dynamically extracting characteristics of the network, and a deception diversifier dynamically triggering changes in the deception strategy, distribution and implementation, based on changes in the network as detected from the network characteristics extracted by the deception adaptor.

There is additionally provided in accordance with an embodiment of the present invention a method for detecting attackers within a dynamically changing network of resources, including repeatedly designating a current deception policy that includes one or more decoy attack vectors, one or more resources of a network in which the one or more decoy attack vectors are generated, and a schedule for generating the one or more decoy attack vectors in the one or more resources, wherein an attack vector is an object in a first resource that may be used to access or discover a second resource, and wherein the network of resources is dynamically changing, repeatedly generating one or more decoy attack vectors in one or more resources in the network, in accordance with the then current deception policy, repeatedly extracting characteristics of the network, and repeatedly triggering changes in the deception strategy, distribution and implementation, based on changes in the network as detected from the thus-extracted network characteristic.

There is further provided in accordance an embodiment of the present invention a method for detecting attackers within a dynamically changing network of resources, including planting a decoy attack vector in a resource in a computer network, the decoy attack vector being an object in memory

6

or storage of the resource that may be used to access or identify a decoy server, the decoy server being a fake resource in the network, repeatedly extracting an activity log of the decoy server, and repeatedly changing the activity log so as to make the decoy server appear dynamically active with the network.

BRIEF DESCRIPTION OF THE DRAWINGS

The present invention will be more fully understood and appreciated from the following detailed description, taken in conjunction with the drawings in which:

FIG. 1 is a simplified diagram of a prior art enterprise network connected to an external internet;

FIG. 2 is a simplified diagram of an enterprise network with network surveillance, in accordance with an embodiment of the present invention;

FIG. 3 is a screenshot of a user interface for configuring Files deceptions, in accordance with an embodiment of the present invention;

FIG. 4 is a simplified diagram of a deception diversifier, which specifies levels of deception diversity to be applied across resources in the network, in accordance with an embodiment of the present invention;

FIG. 5 is a screenshot of a user interface for configuring deceptions for browser history, in accordance with an embodiment of the present invention;

FIG. 6 is a simplified diagram of self-triggered deception changes, in accordance with an embodiment of the present invention; and

FIG. 7 is a simplified flowchart of a method for deception management in an enterprise network, in accordance with an embodiment of the present invention.

For reference to the figures, the following index of elements and their numerals is provided. Similarly numbered elements represent elements of the same type, but they need not be identical elements.

Table of elements in the figures

Element	Description
10	Internet
100	enterprise network
110	network computers
120	network servers
130	network switches and routers
140	mobile devices
150	access governor (optional)
252	forensic alert module
160	SIEM server
170	DNS server
180	firewall
200	enterprise network with network surveillance
220	database of decoy attack vectors
230	policy database
240	decoy servers
242	forensic alert module
260	update server
300	deception management server
310	deployment governor
320	deception deployer
330	deception adaptor
340	deception diversifier
341	change profiler
343	change policy manager
345	change policy assigner
347	change policy scheduler
349	change policy deployer
350	deployment monitor

-continued

Table of elements in the figures	
Element	Description
360	attack risk inspector
370	deception diversity sliders

Elements numbered in the 1000's are operations of flow charts.

DETAILED DESCRIPTION

In accordance with embodiments of the present invention, systems and methods are provided for dynamically managing deception policies for an enterprise network, which adapt to changes that occur in the network environment.

Reference is made to FIG. 2, which is a simplified diagram of an enterprise network 200 with network surveillance, in accordance with an embodiment of the present invention. Network 200 includes a deception management server 300, a database 220 of decoy attack vectors, a policy database 230 and decoy servers 240. In addition, network computers 110 and servers 120 are grouped into groups G1, G2, G3 and G4.

Database 220 stores attack vectors that fake movement and access to computers 110, servers 120 and other resources in network 200. Attack vectors include inter alia: user names of the form <username>
user credentials of the form <username> <password>
user credentials of the form <username> <hash of password>
user credentials of the form <username> <ticket>
FTP server addresses of the form <FTP address>
FTP server credentials of the form <FTP address> <username> <password>
SSH server addresses of the form <SSH address>
SSH server credentials of the form <SSH address> <username> <password>
shared location addresses of the form <SMB address>

Each decoy attack vector in database 220 may point to (i) a real resource that exists within network 200, e.g., an FTP server, (ii) a decoy resource that exists within network 200, e.g., a decoy server 240, or (iii) a resource that does not exist. In the latter case, when an attacker attempts to access a resource that does not exist, access governor 150 recognizes a pointer to a resource that is non-existent. Access governor 150 responds by notifying deception management server 300, or by re-directing the pointer to a resource that does exist in order to track the attacker's moves, or both.

The attack vectors stored in database 220 are categorized by families, such as inter alia

F1—user credentials

F2—files

F3—connections

F4—FTP logins

F5—SSH logins

F6—shared location names

F7—databases

F8—network devices

F9—URLs

F10—Remote Desktop Protocol (RDP)

F11—recent commands

F12—scanners

F13—cookies

F14—cache

F15—Virtual Private Network (VPN)

F16—key logger

Credentials for a computer B that reside on a computer A provide an attack vector for an attacker from computer A to computer B.

Reference is made to FIG. 3, which is a screenshot of a user interface for configuring Files deceptions, in accordance with an embodiment of the present invention. As shown in FIG. 3, decoy attack vectors for files comprise deceptive information relating to saved credentials in local files. The decoy attack vectors tempt an attacker to access a file of decoy usernames and passwords, and to use those credentials to access network resources. The access attempt triggers an alert that exposes the attacker's activity.

Database 220 communicates with an update server 260, which updates database 220 as new types of attack vectors for accessing, manipulating and hopping to computers evolve over time. Update server 260 may be a separate server, or a part of deception management server 300.

Policy database 230 stores, for each group of computers, G1, G2, . . . , policies for generating decoy attack vectors on computers in that group. Each policy specifies decoy attack vectors that are generated in each group, in accordance with attack vectors stored in database 220. For user credentials, the decoy attack vectors planted on a computer lead to another resource in the network. For attack vectors to access an FTP or other server, the decoy attack vectors planted on a computer lead to a decoy server 240.

Deception management server 300 includes six primary components; namely, a deployment governor 310, a deception deployer 320, a deception adaptor 330, a deception diversifier 340, a deployment monitor 350 and an attack risk inspector 360. Deployment governor 310 defines a deception policy. The deception policy defines different deception types, different deception combinations, response procedures, notification services, and assignments of policies to specific network nodes, network users, groups of nodes or users or both. The deception policy specifies one or more decoy attack vectors; one or more resources in network 200 in which the one or more decoy attack vectors are "planted", i.e., generated; and a schedule for generating the one or more decoy attack vectors in the one or more resources.

Once policies are defined, they are stored in policy database 230 with the defined assignments.

Deception deployer 320 plants one or more decoy attack vectors on one or more resources in network 200, in accordance with the deception policy specified by deployment governor 310. Deception deployer 320 plants each decoy, based on its type, on network resources, as appropriate. Deception deployer 320 plants the decoy attack vectors in such a way that the chances of a valid user accessing the decoy attack vectors are low. Deception deployer 320 may or may not stay resident on resources.

Deception adaptor 330 is an environment discovery tool that auto-learns the enterprise environment, including inter alia conventions for usernames, workstation names, server names and shared folder names. Deception adaptor 330 analyzes the organization of network 200 and dynamically triggers changes in the deception policy based on changes in network 200. Deception adaptor 330 extracts characteristics of network 200 from multiple sources, including inter alia: management tools, e.g., directories such as AD and LDAP;

asset management, e.g., Tivoli and HPOV;
configuration management, e.g., CMDB;
network management, e.g., Cisco Works and SDN;

user management;
 tools—general and third party tools;
 device management, e.g., endpoints, mobile devices, and
 Windows/Linux/Mac/iOS/Android servers;
 applications, e.g., portal, FTP client, and database;
 data, e.g., files and SharePoint.

Reference is made to FIG. 4, which is a simplified diagram of deception diversifier 340, which specifies levels of deception diversity to be applied across resources in the network, in accordance with an embodiment of the present invention. Deception diversifier 340 generates a current view of the network from the characteristics extracted by deception adaptor 330 and, based on changes identified in the view, generates deception policy changes, including inter alia a specification of levels of deception diversity to be applied across resources in network 200, as shown in FIG. 4. The deception policy changes are provided to deception governor 310, and then deployed by deception deployer 320.

FIG. 4 shows respective options 344 and 346 for automatic and custom diversification. For the custom diversification option, the levels of diversification are set manually by an administrator of network 200. In an alternative embodiment of the present invention, the levels of diversification are randomly set.

Reference is made to FIG. 5, which is a screenshot of a user interface for configuring deceptions for browser history, in accordance with an embodiment of the present invention. As shown in FIG. 5, decoy attack vectors relate to web hosts in a domain. The decoy attack vectors lure an attacker to attempt to access decoy web servers. The access attempt triggers an alert that exposes the attacker's activity. Sliders 370 are used to set levels of deception diversity for the decoy web servers.

Deception diversifier 340 responds to various change triggers extracted from the above sources. Changes in deception policy may be performed manually by an administrator, scheduled via policy governor 310, or performed autonomously. The need for change can be triggered by the environment, or can be self-triggered. Reference is made to FIG. 6, which is a simplified diagram of self-triggered deception changes, in accordance with an embodiment of the present invention. FIG. 6 shows an activity log of login access and data editing at a decoy resource, at a first point in time T(n). Deception adaptor 330 analyzes the activity logs and dynamically changes them as appropriate so that the decoy resource appears to an attacker as being active in enterprise network 200. E.g., FIG. 6 shows that the last modified time has been changed to 2/14/15, and the last accessed time has been changed to 2/13/15. The activity log at time T(n+1) appears as shown in FIG. 6 and, as such, the decoy resource appears to an attacker as being active.

Deception diversifier 340 includes five primary modules. A change profiler 341 analyzes changes in network 200 including inter alia changes in nature, entities, scope, form and naming convention. A change policy manager 343 defines deception deployment logic changes. A change policy assigner 345 defines deception deployment scope changes, such as on which network entities changes should be deployed. A change policy scheduler 347 defines deployment schedule changes. A change policy deployer 349 transmits changes to deception governor 310.

Deployment monitor 350 collects information about the current deployment of decoys across the network, and presents this information to an administrator of network 200 in an interactive way whereby the administrator is able to interactively change the deployment policy via deployment governor 310. In an embodiment of the present invention,

deployment governor 310 uses deployment monitor 350 to automatically recommend changes to the administrator, so as to ensure that the enterprise always uses optimal fitted deceptions.

Attack risk inspector 360 inspects network 200 to search for real attack vectors that exist in network 200, and to find elements and artifacts in network 200 that can be used by an attacker as attack vectors, including inter alia credentials and connections to FTP, SSH and RDP servers. Based on the elements and artifacts found by attack risk inspector 360, deception governor 310 and deception diversifier 340 generate policies that resemble real attack vectors present in network 200, thereby ensuring that the deceptions deployed by deception deployer 340 are custom-fit in type, profile and ratio, to create an optimal deceptive environment.

Once an attacker is detected, a “response procedure” is launched. The response procedure includes inter alia various notifications to various tools, and actions on the source node where detection of use of a decoy has occurred, such as launching a forensics collection and investigation process, and isolating, shutting down and re-imaging one or more network nodes. The response procedure collects information available on one or more nodes that may help in identifying the attacker's attack acts, intention and progress.

Each decoy server 240 activates a forensic alert module 242, which alerts deception management server 300 that an attacker is accessing the decoy server via a computer 110 on the network. Access governor 150 also activates a forensic alert module 252, which alerts deception management server 300 that an attacker is attempting to use a decoy credential.

Notification servers (not shown) are notified when an attacker uses a decoy. The notification servers may discover this by themselves, or by using information stored on access governor 150 and SIEM 160. The notification servers forward notifications, or results of processing multiple notifications, to create notification time lines or other such analytics.

Reference is made to FIG. 7, which is a simplified flowchart of a method for deception management in network 200, in accordance with an embodiment of the present invention. Operations 1010-1040 shown in FIG. 7 are performed repeatedly over time. At operation 1010 a deception management server, such as deception management server 300, specifies a current deception policy that includes (i) one or more decoy attack vectors, (ii) one or more resources from network 200, and a deployment schedule. At operation 1020 the deception management server generates the one or more decoy attack vectors in the one or more resources in network 200 in accordance with the deployment schedule. At operation 1030 the deception management server analyzes network 200 for changes in the network, and extracts current characteristics of the network. At operation 1040 the deception management server triggers changes in the deception policy based on the changes in the network characteristics identified at operation 1030.

Deception management server 300 also monitors network 200 for decoy attack vectors that were improperly deployed or that were removed from one or more resources, e.g., when a machine is re-booted, and regenerates those decoy attack vectors on those resources.

In the foregoing specification, the invention has been described with reference to specific exemplary embodiments thereof. It will, however, be evident that various modifications and changes may be made to the specific exemplary embodiments without departing from the broader spirit and

scope of the invention. Accordingly, the specification and drawings are to be regarded in an illustrative rather than a restrictive sense.

What is claimed is:

1. A deception management system (DMS) to detect attackers within a dynamically changing network of computer resources, comprising:

a deployment governor dynamically designating deception policies, each deception policy comprising (i) names of non-existing web servers, and (ii) levels of diversity for planting the names of non-existing web servers in browser histories of web browsers within the computer resources of the network, the levels of diversity specifying how densely the name of each non-existing web server is planted within the computer resources of the network;

a deception deployer dynamically planting the names of non-existing web servers in the browser histories of the web browsers in the computer resources in the network, in accordance with the levels of diversity of a current deception policy; and

a notification processor transmitting an alert to an administrator of the network in response to an attempt to access one of the non-existing web servers.

2. The DMS of claim 1 further comprising a deployment monitor collecting information about the current deployment of names of non-existing web servers in the browser histories of the web browsers within the computer resources in the network, and presenting the collected information to the administrator of the network in an interactive way whereby the administrator is able to interactively change the deception policy via said deployment governor.

3. The DMS of claim 1 wherein the network comprises one or more decoy servers accessible from the computer resources in the network via the one or more names of the non-existing web servers.

4. The DMS of claim 1, further comprising an attack risk inspector inspecting the network to find names of existing web servers in the browser histories of the web browsers within resources of the network, and wherein said deployment governor designates deception policies using the

names of the non-existing web servers that resemble the names of existing web servers found by said attack risk inspector.

5. A deception management system (DMS) to detect attackers within a dynamically changing network of computer resources, comprising:

a deployment governor dynamically designating deception policies, each deception policy comprising (i) files containing non-existing usernames and passwords, and (ii) levels of diversity for planting the files containing the non-existing usernames and passwords within the computer resources of the network, the levels of diversity specifying how densely each file containing a non-existing username and password is planted within the computer resources of the network;

a deception deployer dynamically planting the files containing non-existing usernames and passwords in the computer resources in the network, in accordance with the levels of diversity of a current deception policy; and a notification processor transmitting an alert to an administrator of the network in response to an attempt to use one of the non-existing usernames and passwords.

6. The DMS of claim 5 further comprising a deployment monitor collecting information about the current deployment of files containing the non-existing usernames and passwords within the computer resources in the network, and presenting the collected information to the administrator of the network in an interactive way whereby the administrator is able to interactively change the deception policy via said deployment governor.

7. The DMS of claim 5 wherein the network comprises one or more decoy computer resources accessible via the non-existing usernames and passwords.

8. The DMS of claim 5, further comprising an attack risk inspector inspecting the network to find files containing existing usernames and passwords within the computer resources of the network, and wherein said deployment governor designates deception policies using the files containing the non-existing usernames and passwords that resemble the files found by said attack risk inspector.

* * * * *